
ADDENDUM #1 - DECEMBER 14, 2011

RE: BAY AREA HOSPITAL BUILDING EXPANSION
MRI Upgrade
Project #11.48

FROM: HGE INC., Architects, Engineers, Surveyors & Planners
375 Park Avenue
Coos Bay, Oregon 97420
541-269-1166



TO: Prospective Bidders

This Addendum forms a part of the Contract Documents and modifies the original Documents dated December 9, 2011, as noted below. Acknowledge receipt of this Addendum in the space provided on the Bid Form. Failure to do so may subject Bidder to disqualification.

This Addendum consists of 1 page together with the following attachments:

- Room Finish Schedule (2 pages)
- AD#1 – Flashing @ Support (1 page)

CHANGES TO PROJECT MANUAL

1. Division 09 – Finishes: Add attached Room Finish Schedule.


CHANGES TO DRAWINGS

1. Replace Drawing 2/A2.4 with attached Drawing AD#1 – Flashing @ Support.
2. Delete Drawing 3/A2.4 and corresponding detail tag.
3. Replace Key Note #4 on Sheet A2.4 with the following: Existing exhaust fan and curb to be removed. Patch metal decking, insulation, and single-ply membrane. Single-ply roof patch and boot membrane material to be 60 mil PVC, heat welded, compatible with existing.

END OF ADDENDUM


Room Finish Schedule
Page 1

BAY AREA HOSPITAL MRI UPGRADE											
ROOM FINISH SCHEDULE											
Room Number	Room Name	Floor		Walls				Ceiling		Remarks	
		Mat.	Base	North	East	South	West	Mat.	Hgt.		
330	Corridor	NO WORK →									
355	Ultra Sound Waiting	NO WORK →									
356	Passage	NO WORK →									
357	Office	NO WORK →									
358	Office	NO WORK →									
359	Dressing	SV	RBR	LEP	LEP	LEP	LEP	SUS 1	8'-0"		
361	Passage	SV	RBR	LEP	LEP	LEP	LEP	SUS 1	8'-0"		
362	Control Room	SV	RBR	LEP	LEP	LEP	LEP	SUS 1	8'-0"		
363	MRI Room	SV	RBR	LEP	LEP	LEP	LEP	SUS 2 GYP LED	9'-6" / 10'-6" at LED Panels	See Detail 3 / A3.1	
364	Ultra Sound	NO WORK →									
365	Ultra Sound						LEP			Patch and paint to match.	
366	Passage	---	---	---	LEP 1.	---	---	---	---	Patch and paint wall. 1.	
367	Ultra Sound View	NO WORK →									
368	Toilet	---	---	LEP 2.	LEP 2.	---	---	---	---	See Interior Elevations. 2.	
369	Laser Printer	NO WORK →									
370	MRI Equipment	VCT	RBR	LEP	LEP	LEP	LEP	SUS 1	8'-0"	Patch and paint to match.	

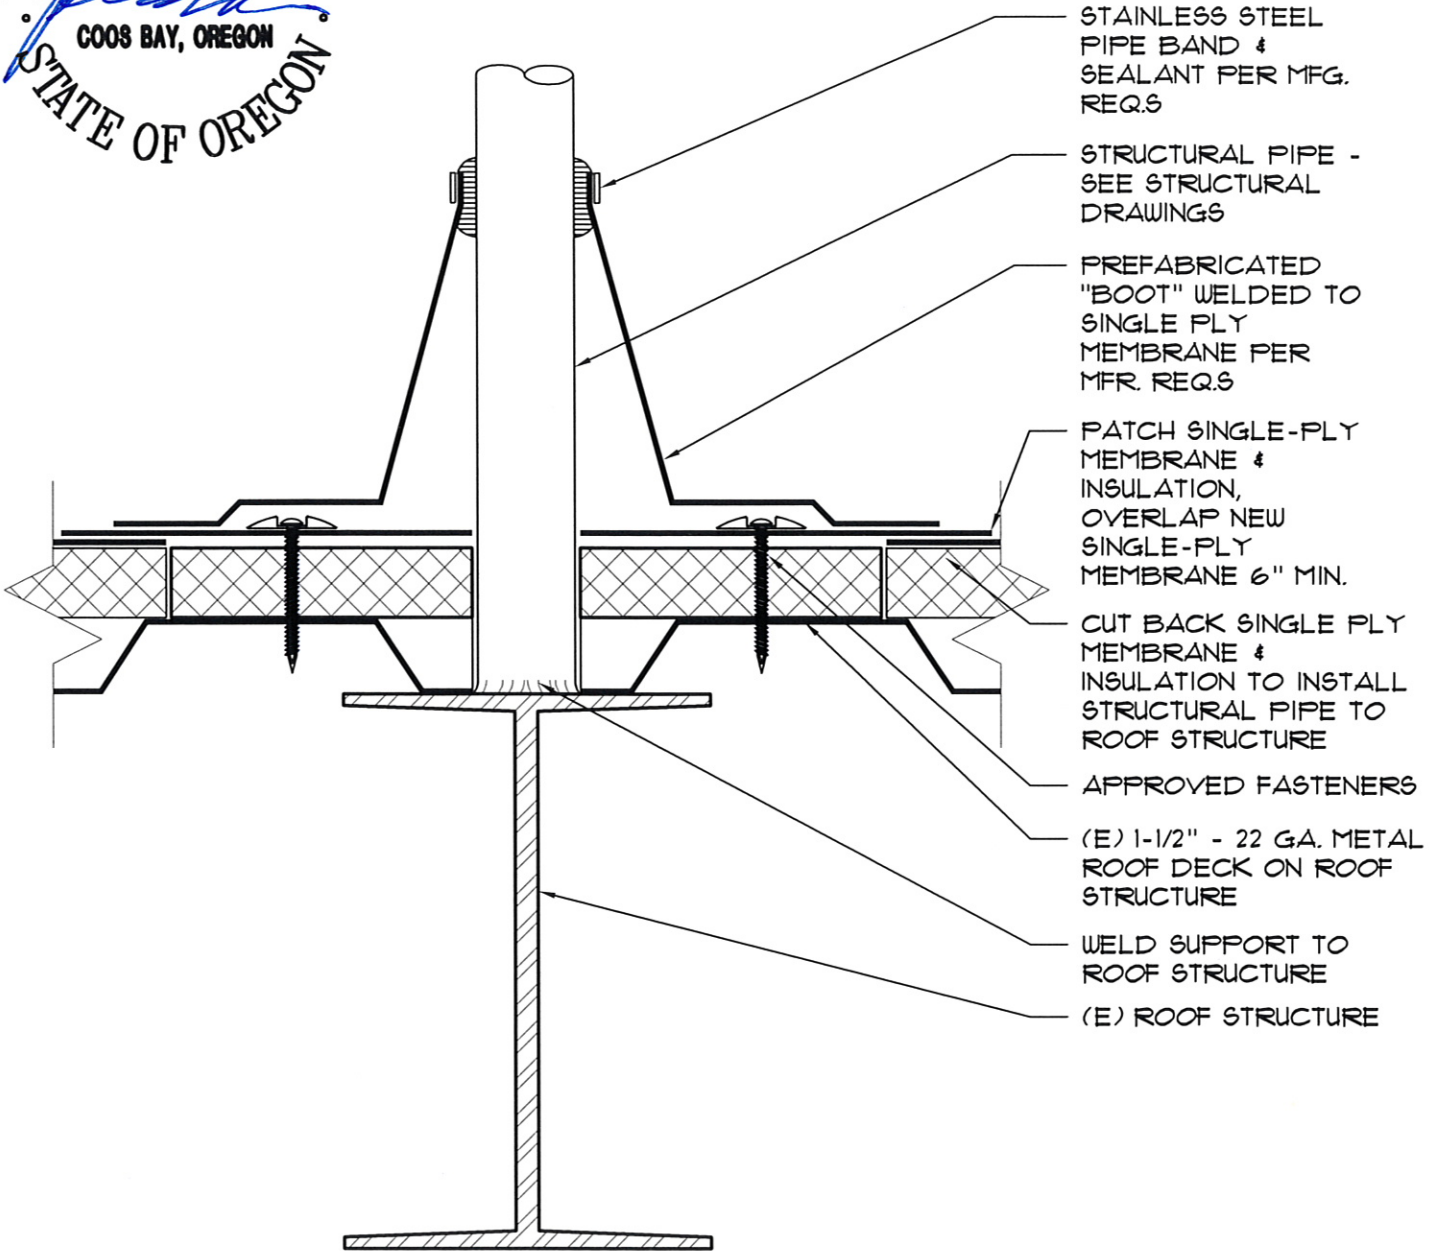

- STAINLESS STEEL PIPE BAND & SEALANT PER MFG. REQ.S
- STRUCTURAL PIPE - SEE STRUCTURAL DRAWINGS
- PREFABRICATED "BOOT" WELDED TO SINGLE PLY MEMBRANE PER MFR. REQ.S
- PATCH SINGLE-PLY MEMBRANE & INSULATION, OVERLAP NEW SINGLE-PLY MEMBRANE 6" MIN.
- CUT BACK SINGLE PLY MEMBRANE & INSULATION TO INSTALL STRUCTURAL PIPE TO ROOF STRUCTURE
- APPROVED FASTENERS
- (E) 1-1/2" - 22 GA. METAL ROOF DECK ON ROOF STRUCTURE
- WELD SUPPORT TO ROOF STRUCTURE
- (E) ROOF STRUCTURE

2 FLASHING @ SUPPORT
 A2.4 SCALE: 3" = 1'-0"

PROJECT: BAY AREA HOSPITAL MRI UPGRADE	11.48	 ARCHITECTS, ENGINEERS, SURVEYORS & PLANNERS <small>375 Park Avenue/Coos Bay, Oregon 97420 (541) 269-1166 19 N. W. Fifth Avenue/Portland, Oregon 97209 (503) 222-1687</small>
	12-14-2011	
TITLE: AD#1 - FLASHING @ SUPPORT		